Peerless


DFM-2535R00-08


COMPRESSION


- Pure Titanium Diaphragm
- Ferrite Magnet
- High Sensitivity



SPECIFICATIONS		
Exit Diameter	1	in
Rated Impedance	8	Ω
Frequency Range [1]	1500 – 15000	Hz
Sensitivity @ 2.83V/1m	107	dB
Sensitivity @ 1W/1m [2]	107	dB
Power Rating (IEC 268-5)	25	W
Minimum Rec. Xover	1500	Hz
Minimum Impedance	7.5	Ω
Net Weight	0.984	kg
Voice Coil Diameter	35.5	mm
Voice Coil Material	CCAW	
Voice Coil Layers	2	
Former Material	ASV	
Diaphragm Material	Titanium	
Surround Material	Kapton	
Magnet Type	Ferrite	

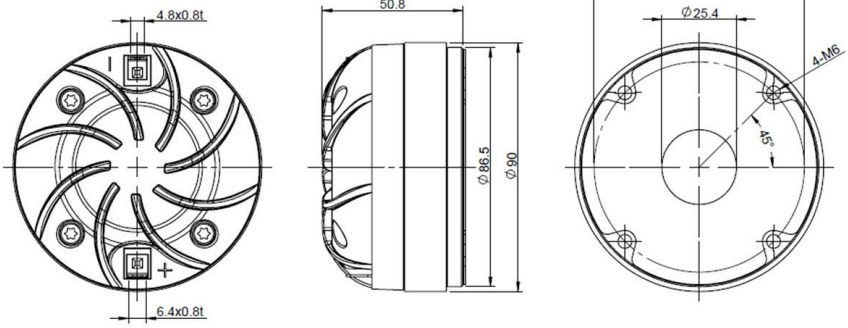

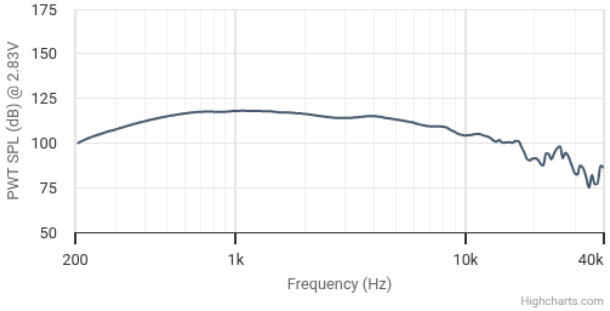

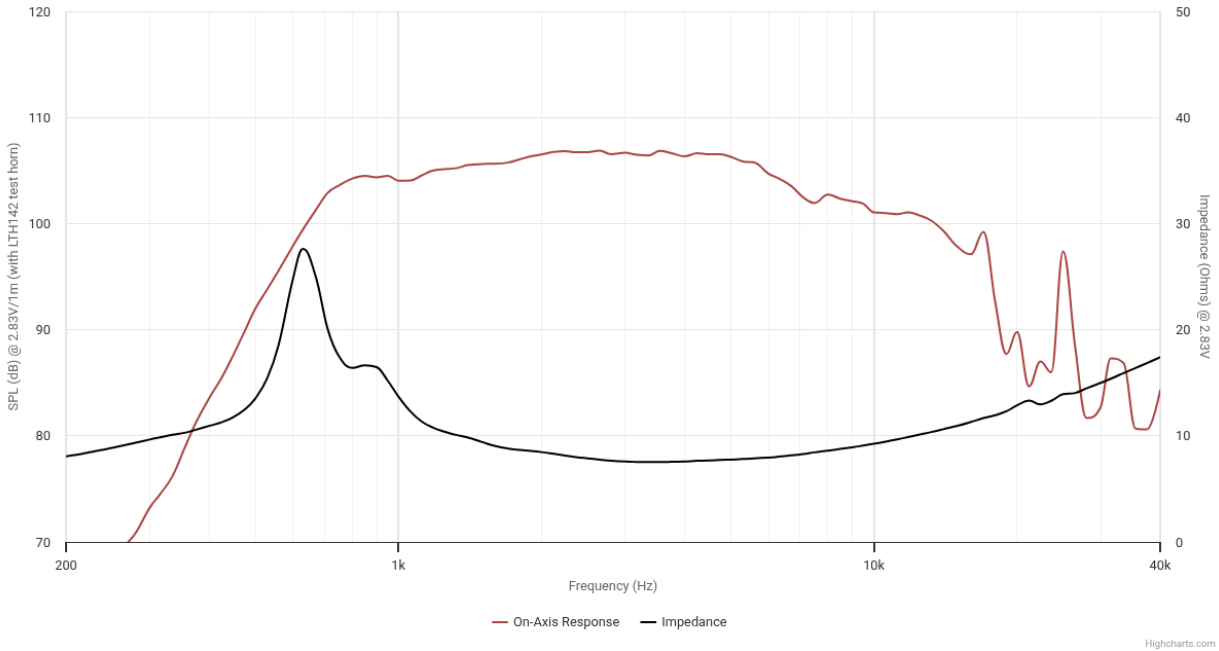

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. [1] Specified by Engineering as linear working range of transducer. [2] Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance.

© Tymphany Enterprises