
DNM-2035R01-16


COMPRESSION


- Titanium Diaphragm
- Neodymium Motor
- High Sensitivity
- High Power and Thermal Handling
- Extended Low Frequency Response



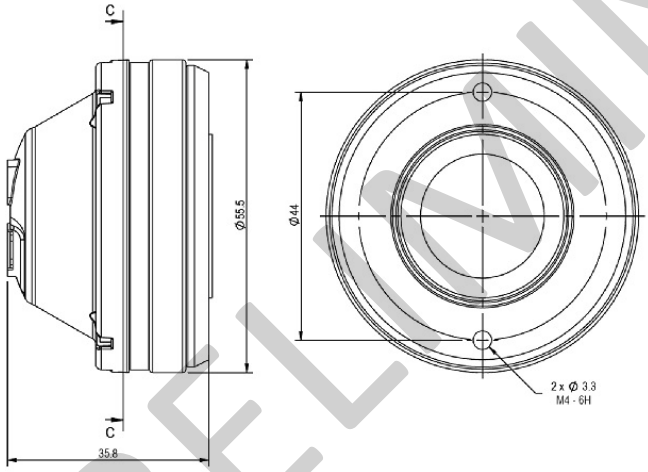

SPECIFICATIONS		
Exit Diameter	0.75	in
Rated Impedance	16	Ω
Frequency Range [1]	1200 – 18000	Hz
Sensitivity @ 2.83V/1m	103	dB
Sensitivity @ 1W/1m [2]	106	dB
Power Rating (AES2-1984)	40	W
Minimum Rec. Xover	1200	Hz
Minimum Impedance	13	Ω
Net Weight	212	g
Voice Coil Diameter	35.6	mm
Voice Coil Material	CCAW	
Voice Coil Layers	2	
Former Material	ASV	
Diaphragm Material	Titanium	
Surround Material	Kapton	
Magnet Type	Neodymium	

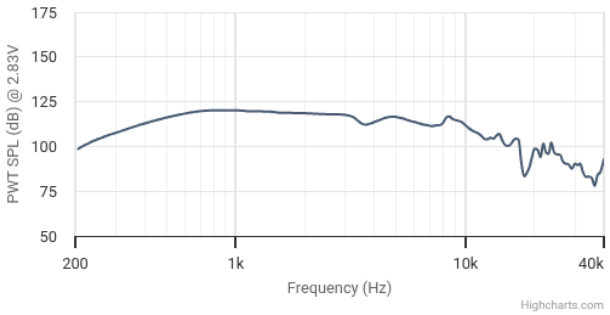

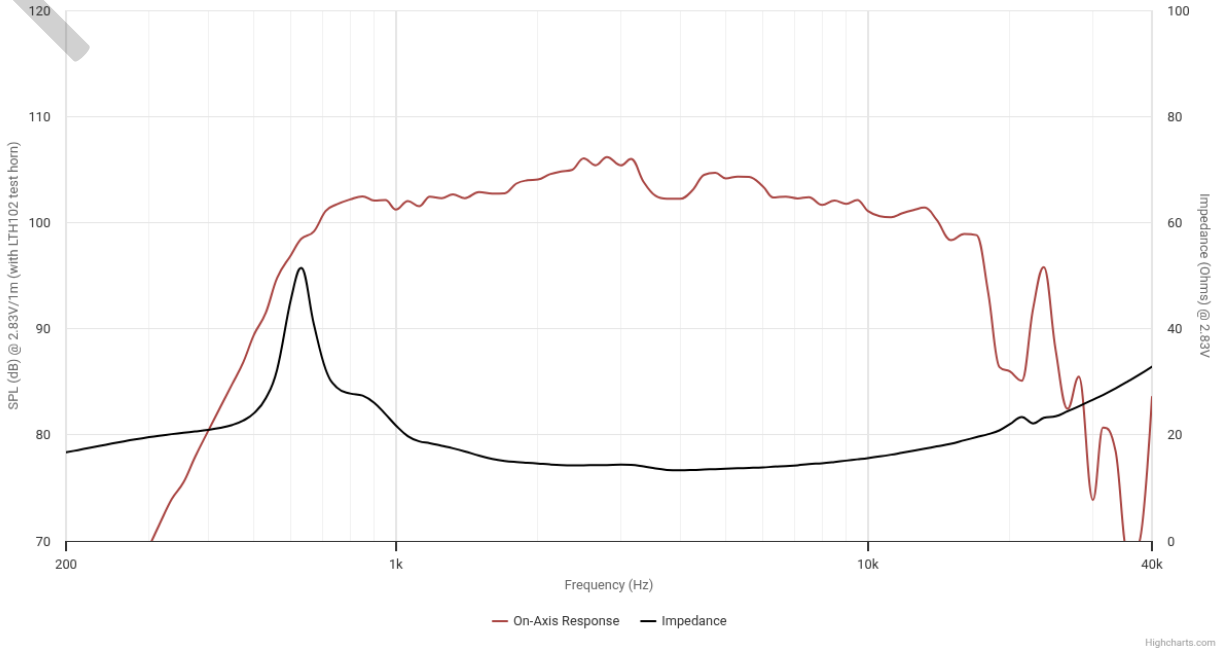

PRELIMINARY

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. [1] Specified by Engineering as linear working range of transducer. [2] Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance.